

Catalogue

OKM Butterfly Valve
Model 616



OKUMURA

616

BUTTERFLY VALVES



Cert. No. Q17412



Friction-Free Performance: Tough New Way to Tame Pressures Up to 16 Bar. (232 psi)

The Okumura 616 Butterfly Valve features a patented "Touch" seat design that works together with an S-shaped disc to provide smooth, dependable bubble-tight shutoff and an extended service. The design accommodates working pressure up to 16 bar. (232 psi) and flanges comply with ISO, ANSI, BS, AS, DIN and JIS.



Fine-Tuned Engineering Concept in Butterfly Valves



Friction-Free Operation for Low Torque, long Service.

The patented "Touch" seat design permits the disc to close with virtually no frictional contact between the disc and the valve seat. And so, there is virtually no wear and tear on the valve's internal structure. The construction ensures a low torque-to-size ratio and improved in-service performance over a conventional design.



S-Shaped Disc Enhances Flow Control.

The S-shaped disc enhances the Cv rating and promotes flow control without turbulence. The valve can be operated at the lowest possible operating torque with bubble-tight shutoff at the maximum operating pressure.

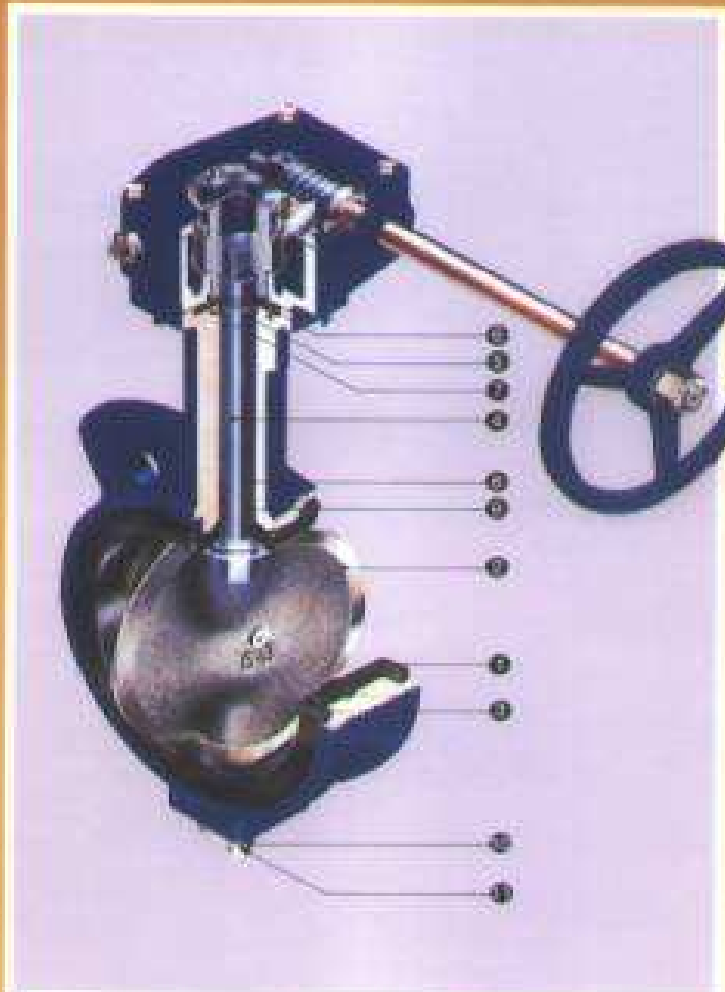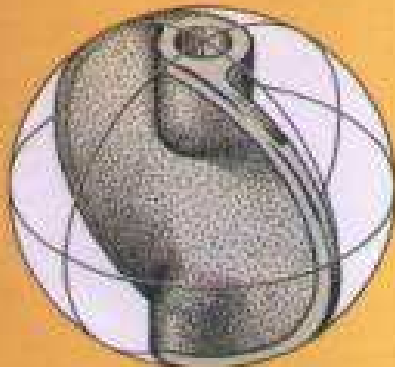


	Standard		Semi-Standard	
	JIS	ASTM	JIS	ASTM
1 Seal Ring	EPDM	EPDM	NBR	NBR
2 Disc	304/316	A36 / CF8	Aluminum Oxide 304/316	ASTM A148 OR 304/316
3 Body	304/316	ASTM A148-12	FC004	A148-12/316
4 Spindle/Shaft	SURF6000	A316 303		
5 O-ring	NBR			
6 O-ring	NBR			
7 Bush	Plastic			
8 Ring	316/304			
9 Bush	Plastic			
10 Gasket	Asbestos-free			
11 Bottom Cover	Stainless steel			

STANDARD SPECIFICATIONS

Nominal Diameter Range	50 to 300 mm (2 to 12 inches)
Applicable Flange Standards	JIS - 10 K, 16 K ANSI - 125 LB, 150 LB Others
Service Pressure	16 bar / 232 psi / 16 kgf / cm ² / 1" dia. / 16 bar only
Hydraulic Seat Test	17.5 bar / 252 psi / 16 kgf / cm ²
Hydraulic Shaft Test	24 bar / 342 psi / 24 kgf / cm ²
Service Temperature Range	EPDM Seal Ring - 20 to 120°C NBR Seal Ring - 10 to 80°C
Actuators	Lever, Gear, Pneumatic Act., Electric Act.
Face to Face Dimensions	Conforms to ISO STANDARD (Short)
Actuator Mounting Flange	Conforms to ISO STANDARD
Standard Coating	Polychlorophenyl PU 1400-9700 Valve Blue II
Service Media	Water, Oil, Air



DIMENSIONS

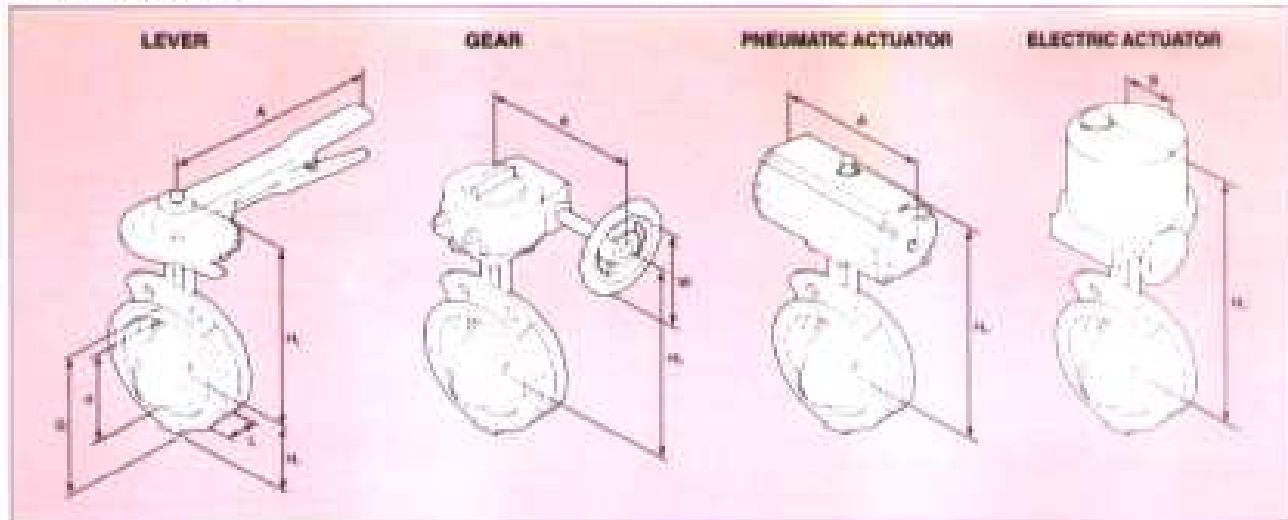

Nominal Bore		LEVER				GEAR		PNEUMATIC ACTUATOR		ELECTRIC ACTUATOR				
Inch	mm	L	d	G	H ₁	H ₂	A	H ₁	A	W	H ₁	A	H ₂	B
2	50	43	55	90	86	179	200	171	192	100	248	133	400	180
2 1/2	65	46	66	108	85	192	200	181	192	100	256	133	410	180
3	80	46	84	124	93	202	200	191	192	100	266	133	455	230
4	100	52	100	146	99	217	200	206	192	100	297	181	470	230
5	125	56	130	179	116	253	360	228	241	140	353	185	492	215
6	150	56	154	204	131	268	360	243	241	140	368	185	507	215
8	200	60	200	256	168	303	360	277	328	200	422	236	552.5	261
10	250	68	246	313	203	-	-	312	328	200	495	270	598	305
12	300	78	295	364	253	-	-	342	328	200	568	282	666	305

PERFORMANCE DATA



Nominal Bore		JIS 10K		JIS 16K		ANSI 150/125/150LB	
Inch	mm	Qty	Hexagonal Bolt & Nut	Qty	Hexagonal Bolt & Nut	Qty	Hexagonal Bolt & Nut
2	50	4	M18 x 100 x 38	8	M18 x 100 x 38	4	1/4-11UNC x 100 x 38
2 1/2	65	4	M18 x 110 x 38	8	M18 x 110 x 38	4	1/4-11UNC x 110 x 38
3	80	8	M18 x 110 x 38	8	M20 x 130 x 48	4	1/4-11UNC x 110 x 38
4	100	8	M18 x 110 x 38	8	M20 x 130 x 52	8	1/4-11UNC x 130 x 38
5	125	8	M20 x 130 x 48	8	M22 x 130 x 56	8	1/4-10UNC x 130 x 48
6	150	8	M20 x 130 x 52	12	M22 x 140 x 56	8	1/4-10UNC x 140 x 48
8	200	12	M20 x 130 x 52	12	M22 x 150 x 56	8	1/4-10UNC x 140 x 48
10	250	12	M22 x 150 x 56	12	M24 x 160 x 60	12	1/4-9UNC x 160 x 56
12	300	16	M22 x 160 x 56	16	M24 x 170 x 60	12	1/4-9UNC x 170 x 56

Specification and design are subject to change without notice.

OKM OKM VALVE (M) SDN. BHD.
ORUMURA ENGINEERING CORP. (Cis No. 173768-V)

FACTORY:
 Lot No. 12, Jalan 26/1, Section 26, Kawasan Perindustrian Heong
 40000 Shah Alam, Selangor Darul Ehsan, Malaysia
 Phone: 60-3-5191-5411 / 5191-1422 / 5191-1702 / 5191-37345
 Fax: 60-3-5191-1366

ORUMURA ENGINEERING CORP.
HEAD OFFICE:
 448-1, Orumura, Hiroshima, Daito-gun, Shiga 525-16, Japan
 Phone: 81-768-52-2171 / Fax: 81-768-52-5225

OSAKA OVERSEAS DEPT.
 5-1-16, 1-chome, Minato-ku, Nishi-ku, Osaka 550-0004, Japan
 Phone: 81-6-644-5650 / Fax: 81-6-644-5151

